URBAN CUTPILE

TECHNICAL SPECIFICATION

Manufacturing method		: Saxony
Pile type		: Cut pile
Pile fibre		: 100% polyamide 6 solution-dyed
Gauge		: 1/10"
Pile weight		: 1100 gr/m^2
Pile height		: 3.8 mm
Total weight		: 4300 gr/m^2
Total thickness		: 6.6 mm
Tuft density		: 173.800/m^2
Tile size		: 50 x 50 cm
Backing		: Polyflex
Tiles per box		: 20

PERFORMANCE

Use classification		: 23 + 33
Caster chair test	EN 985	: A, intensive use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.07 m^2 K/W
Sound absorption	ISO 140-8	: 24 dB
Luxery class		: LC4
DOP-nr		: 1016-2612
Prodis-nr		: 3DB08DC8

ELECTROSTATIC

Static loading		: Anti-static
Walking test	EN 1815	: 0.5 kV
Horizontal resistance	ISO 1096 5	: 3.19 x 10.^{10} Ohm
Vertical resistance	ISO 1096 5	: 1.45 x 10.^{10}Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1	: Bfl-s1
Reaction to fire	BS 4790	: Medium radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02	: 7.0 - 8.0
Rubbing	ISO 105 x12	: 5.0
Water	ISO 105 E01	: 5.0

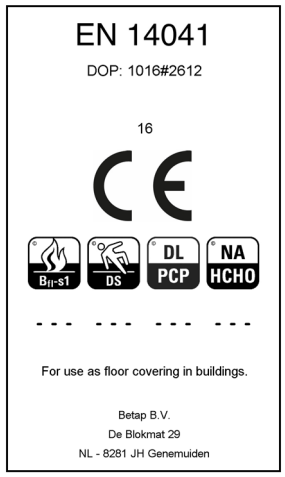

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

All rights reserved to alter technical specifications.